


直径固定型

产品特点: 嵌入后安装不需要再安装孔内进行沉孔加工。

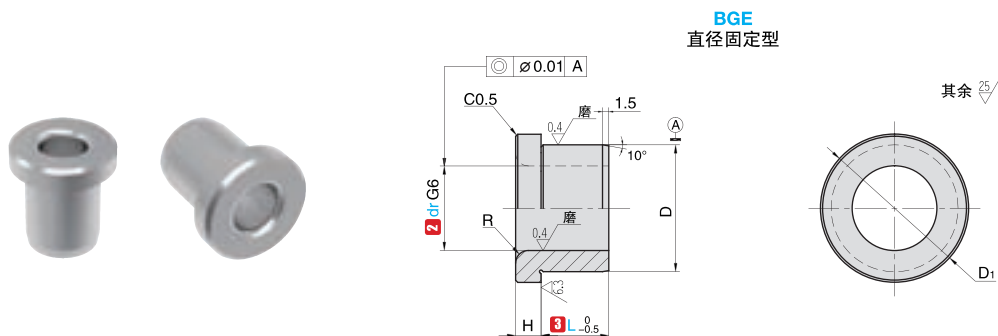

BGE
直径固定型

订购编号示例

1 代号 - 2 dr - 3 L - 4 D 公差
BGE - 5 - 6 - p6

1 代号	主要尺寸													
	2 dr	3 L								D	D ₁	H	R	
BGE	2	5	6	8	10	12				5	9	2.5	0.8	
	3	5	6	8	10	12				7	11			
	4	5	6	8	10	12	15	16	20	8	12			
	5	5	6	8	10	12	15	16	20	10	14	3	1	
	6	5	6	8	10	12	15	16	20	25				10
	8	5	6	8	10	12	15	16	20	25	12	16	4	2
	10		6	8	10	12	15	16	20	25	15	19		
	12			8	10	12	15	16	20	25	18	22		
	13				10	12	15	16	20	25	22	26		
	15					12	15	16	20	25	25	30		
	16						12	15	16	20	25	30	30	5
	20							12	15	16	20	25	30	
	25								16	20	25	30	35	
											35	40	6	3

▲与 m6 型相比、p6 型的内径收缩较大, 因此在进行孔加工时请予以注意, 尺寸变化请参照技术信息。

dr	dr 公差
	G6
2	+0.008
3	+0.002
4	
5	+0.012
6	+0.004
8	
10	+0.014
12	+0.005
13	
15	+0.017
16	+0.006
20	
25	+0.020
	+0.007

D	4 D 公差	
	p6	m6
5	+0.020	+0.012
	+0.012	+0.004
7		
8	+0.024	+0.015
	+0.015	+0.006
10		
12		
15	+0.029	+0.018
	+0.018	+0.007
18		
22		
25	+0.035	+0.021
	+0.022	+0.008
26		
30		
35	+0.042	+0.025
	+0.026	+0.009

材质	表面处理	硬度
9CrWMn	-	淬火硬度 60HRC~

定位销
夹具衬套