


## 10A 系列传动链轮

产品特点: 产品内孔标准化, 可直接用于现场安装。

10A系列

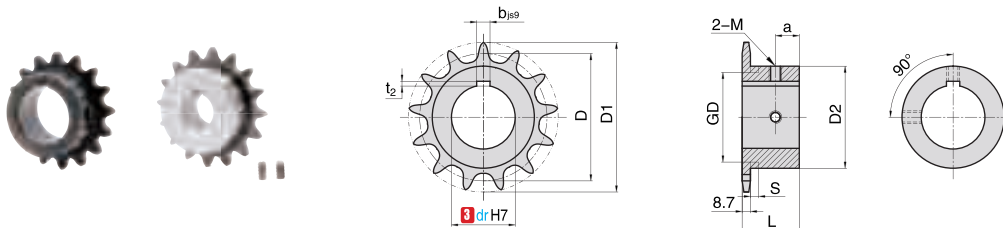

▲键槽中心对准齿尖中心

对应链条尺寸系列
10A

代号	材质	热处理	表面处理	附件
DSFA10AB	45#	齿部高频淬火 HRC40-50	无	发黑
DSFB10AB				
DSFC10AB	304	无	无	紧固螺钉

订购编号示例

1 代号 - 2 齿数 - 3 dr  
DSFA10AB - 15 - 28

1 代号	2 齿数	主要尺寸					总长 L	a	重量 kg				
		3 孔径 dr											
DSFA10AB DSFB10AB	▲ 9	16 17 18 19					46.42	53	34	25	5	0.2	
	▲ 10	15 16 17 18 19 20 22 24 25					51.37	58	40			0.27	
	▲ 11	15 16 17 18 19 20 22 24 25 28 30 32					56.35	64	45.5			0.33	
	▲ 12	14 15 16 17 18 19 20 22 24 25 28 30 32					61.34	69	50			0.41	
	▲ 13	14 15 16 17 18 19 20 22 24 25 28 30 32					66.34	74	51	7	7	0.46	
	14	14 15 16 17 18 19 20 22 24 25 28 30 32 35					71.34	79	52			0.52	
	15	14 15 16 17 18 19 20 22 24 25 28 30 32 35 38					76.35	84	57			0.62	
	16	14 15 16 17 18 19 20 22 24 25 28 30 32 35 38 40					81.37	89	62			0.72	
	17						86.39	94	67	28	8	0.83	
	18	14 15 16 17 18 19 20 22 24 25 28 30 32 35 38 40 42 45					91.42	100	72			1	
	19						96.45	105				1.1	
	20	14 15 16 17 18 19 20 22 24 25 28 30 32 35 38 40 42 45 50					101.48	110				1.2	
	21						106.51	115		1.2			
	22						111.55	120		1.3			
	23	17 18 19 20 22 24 25 28 30 32 35 38 40 42 45					116.58	125	73	28	8	1.3	
	24						121.62	130					1.4
	25						126.66	135					1.5
	26	24 25 28 30 32 35 38 40 45					131.7	140					1.5
	28	24 25 28 30 32 35 38 40 42 45					141.79	150		1.6			
	30	22 25 28 30 32 35 38 40 45					151.87	161		1.8			
32						161.96	171		1.9				
34	25 28 30 32 35 38 40 45					172.05	181		2.1				
35						177.1	186		2.2				
DSFC10AB	▲ 10	20 22					51.37	58	40	25	5	0.27	
	▲ 11	20 22 24 25					56.35	64	45.5			0.33	
	▲ 12	20 22 24 25					61.34	69	50			0.41	
	▲ 13	20 22 24 25 28 30					66.34	74	51			0.46	
	14	20 22 24 25 28 30					71.34	79	52	7	7	0.52	
	15	20 22 24 25 28 30 32					76.35	84	57			0.62	
	16	20 22 24 25 28 30 32 38					81.37	89	62			0.72	
	17	20 22 24 25 28 30 32 35 38					86.39	94	67			0.83	
	18						91.42	100	72	28	8	1	
	19	20 22 24 25 28 30 32 35 38 40					96.45	105				1.1	
	20						101.48	110				1.2	
	21						106.51	115				1.2	
	22						111.55	120		1.3			
	23						116.58	125	73	28	8	1.3	
	24	20 25 30 35					121.62	130					1.4
	25	20 25 30 35 40					126.66	135					1.5
	26	20 25 30 35 40					131.7	140					1.5
28	20 25 30 35 40					141.79	150		1.6				
30	20 25 30 35 40					151.87	161		1.8				
32						161.96	171		1.9				
35	25 30 35					177.1	186		2.2				

轴孔加工尺寸

轴孔直径 dr	键槽 b × t <sub>2</sub>	固定螺丝 M
14 ~ 17	5 × 2.3	M6
18 ~ 22	6 × 2.8	M6
24 ~ 30	8 × 3.3	M8
32 ~ 38	10 × 3.3	M8
39 ~ 44	12 × 3.3	M8
45 ~ 50	14 × 3.8	M10

带有▲的产品在轮毂外径上带有槽口, 尺寸如下表

齿数	s	GD
9	6.4	29
10		34
11		39
12		44
13		49