


双槽型

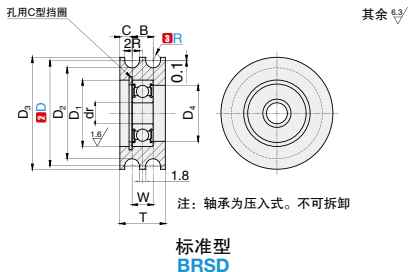

标准型
BRSD

订购编号示例

1 代号 - 2 D - 3 R - 4 追加加工代码
 BRSD - 30 - 1.1
 BRSD - 45 - 2.1 - DS

1 代号	主要尺寸											轴承公称型号	B	C	适用圆皮带直径	
	2 D	3 R	dr	D ₁	D ₂	D ₃	D ₄	T	W	D ₅	D ₆					
BRSD	15	1.1	3	10	13	17	8	9	4	RM623-2Z	4	2.5	2			
	20		4	13	18	22	11	10		RM624-2Z	5					
	30		6	19	28	32	16	11		RM626-2Z	6					
	20	1.6	4	13	17	22	11	11	5	RM624-2Z	5	3	3			
	30		6	19	27	32	16			RM626-2Z	6	2.5				
	40		10	26	37	42	23			14	R6000-2Z	8		3		
	45				42	47					R6000-2Z	8		3		
	23	2.1	6	19	15	19	25	13	13	6	RM696-2Z	5	4	4		
	28				24	30	16	RM626-2Z			6	3.5				
	30				26	32										
	40				36	42										
	45				41	47	23	14			R6000-2Z	8	3			
	48	44	50													
	28	2.6	8	19	23	30	16	15	7	10	RM69/8-2Z	6	4.5	5		
	40				10	26	35	42			23	R6000-2Z	8		4	
	50				12	32	45	52			27	R6201-2Z	10		3	
	28	3.1	6	19	22	30	16	17	18	8	RM626-2Z	6	5.5	6		
	38				10	26	32	40			23	R6000-2Z	8		5	
	48						42	50								
	50						44	52								
	60				12	32	54	62			27	R6201-2Z	10		4	
	75							69								77
	100							94								102
	50	4.1	12	32				42	52	27				21		10
60	52				62											
100	92				102	30	R6202-2Z	11	5							
60	50				62											
100	5.1	15	35	90	102	30	25	12	R6202-2Z	11	7	10				
140				130	142											

3 追加加工类型	外径缩短
代号	DS
示例图	
详细信息	切割外圆减少外径尺寸 皮带半径 / R 适用 R 尺寸 DS 1.1 D+0.8 1.6 D+1.2 2.1 D+1.6 2.6 D+1.8 仅适用于 R=1.1 · 1.6 · 2.1 · 2.6 的产品 外圆切割的加工面可能不 进行表面处理
指定方法	指定方法 DS

代号	材质	表面处理	轴承材质	附件
BRSD	铝合金	本色阳极氧化	钢	孔用 C 型挡圈 (SS304)

皮带惰轮