


外紧固型

产品特点: 适用于薄壁轮毂与轴的联接, 轴径较大, 可以传递较大扭矩的特点, 结构简单, 使用方便。

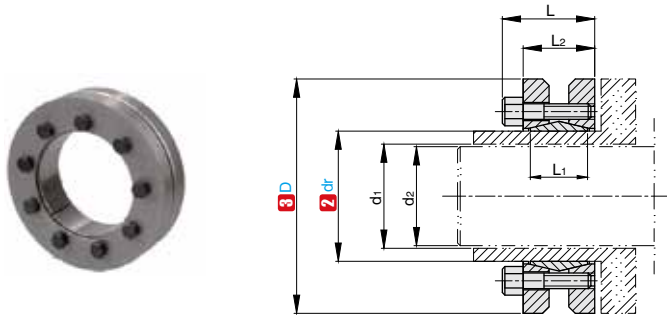

EDO
外紧固型

主体材质	表面处理
45#	光饰

▲ 若有特殊需求, 可提供 45# 无电解镀锌、SUS304 材质的同规格产品, 具体请与销售人员联系。

订购编号示例

1 代号 - 2 内径 dr × 3 外径 D
EDO - 30 × 60

1 代号	主要尺寸						最大间隙 (d1~d2)	额定负荷		紧锁螺钉		螺钉锁紧扭矩 (N·m) Ts
	内径	外径	d1	L	L1	L2		轴向力 (KN)	扭矩 (N·m)	数量	规格	
	2 dr	3 D						Ft	Mt			
EDO	24	50	19	23	14	19.5	0.017	23	216	6	M5	4
			20					27	265			
			21					30	314			
	30	60	24	25	16	21.5	0.017	31	372	7	M5	4
			25					34	421			
			26					36	461			
	36	72	26	27.5	18	23.5	0.032	36.3	471	5	M6	12
			28					39.3	550			
			30					47.5	713			
	44	80	32	29.5	20	25.5	0.032	57.8	925	7	M6	12
			35					67.1	1175			
			36					70.8	1275			
	50	90	38	31.5	22	27.5	0.032	69.1	1313	8	M6	12
			40					81.9	1638			
			42					91.7	1925			
	55	100	42	34.5	23	30.5	0.032	69.0	1450	8	M6	12
			45					84.4	1900			
			48					97.9	2350			
	62	110	48	34.5	23	30.5	0.048	116	2775	10	M8	30
			50					131	3275			
			52					139	3613			
	68	115	50	34.5	23	30.5	0.048	100	2500	10	M8	30
			55					114	3125			
			60					131	3938			
75	138	55	37.8	25	32.5	0.048	114	3125	7	M8	30	
		60					133	4000				
		65					152	4938				
80	145	60	37.8	25	32.5	0.048	133	4000	7	M8	30	
		65					150	4875				
		70					164	5750				
90	155	65	44.3	30	39	0.048	183	5938	10	M8	30	
		70					214	7500				
		75					242	9063				
100	170	70	49.3	34	44	0.048	246	8625	12	M8	30	
		75					250	9375				
		80					281	11250				
110	185	75	56.4	39	50	0.048	240	9000	9	M10	59	
		80					281	11250				
		85					318	13500				
115	188	85	57	39	50	0.048	271	11500	10	M10	59	
		90					350	15750				
		95					395	18750				
125	215	85	60.4	42	54	0.069	324	13750	12	M12	100	
		90					361	16250				
		95					395	18750				
140	230	95	68	46	60.5	0.069	397	18875	10	M12	100	
		100					440	22000				
		105					479	25125				
155	265	105	72	50	64.5	0.069	524	27500	12	M12	100	
		110					568	31250				
		115					609	35000				