

螺母安装 · 挡圈型

产品特点：侧板螺母安装，零件侧挡圈紧固，承载较高。


订购编号示例

1 代号 - 2 D - 3 B - 4 L - 5 F - 6 H - 7 材料代码
 HCGSHX - 5 - B10 - L30 - F5 - B
 HCGSND - 15 - B34 - L67 - F10 - H20 - D



标准型



HCGSNX
螺纹长度固定型

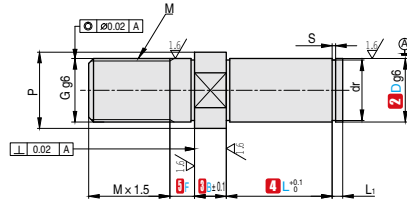



HCGSND
螺纹长度选择型

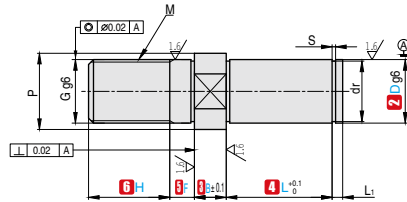

1 代号	轴径		3 B 指定单位 1mm	4 L 指定单位 1mm	5 F 指定单位 1mm	6 H 指定单位 1mm	dr		主要尺寸									
	2 D	公差 g6					基准尺寸	公差	P	G g6	L1	S	W	M (粗牙)				
HCGSNX HCGSND	3	-0.002 -0.008	2~30	3~50	3~8	3~6	2	+0.060 0	7	3	2	0.5	5	M3				
	4	-0.004					4~8	3							8	4	6	M4
	5	-0.012					5~10	4							9	5		
	6	-0.012	2~60	5~100	5~10	6~12	5	0	10	6		0.7	8	M6				
	8	-0.005 -0.014				8~16	7	+0.090 0	12	8					3	0.9	10	M8
	10	-0.014				10~20	9.6	0	15	10		4	1.15	13				
	12	-0.006 -0.017				10~100	5~15	12~24	11.5	0	17				12	14	M12	
	15	-0.017	14.3	-0.110	20				12	17								

▲仅螺纹长度选择型可指定 H

台阶型

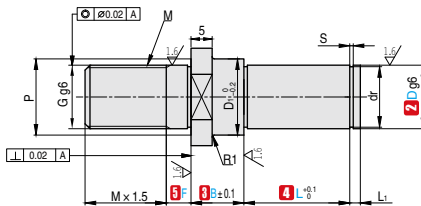

HCGSS
台阶型

1 代号	轴径		3 B 指定单位 1mm	4 L 指定单位 1mm	5 F 指定单位 1mm	dr		主要尺寸													
	2 D	公差 g6				基准尺寸	公差	P	G g6	D1	L1	S	W	M (粗牙)							
HCGSS	3	-0.002 -0.008	7~30	3~50	3~8	2	+0.060 0	7	3	5	0.5	5	M3								
	4	-0.004												3	8	4	6	2	0.7	6	M4
	5	-0.012												4	9	5	7				
	6	-0.012	7~60	5~100	5~10	5	0	10	6		8	0.9	10	M8							
	8	-0.005 -0.014				7	+0.090 0	12	8		10				4	1.15	13	M10			
	10	-0.014				9.6	0	15	10		13	14	M12								
	12	-0.006 -0.017				10~100	5~15	12~24	11.5	0	17			12					15	18	
	15	-0.017	14.3	-0.110	20				12	18											

▲(1) B+L ≤ 100

(2) W < D1 时两平面将扩展到直径 D1 的部分


悬臂销 销轴 支头螺钉

螺母安装 · 挡圈型


六角型



HCGSHX
螺纹长度固定型

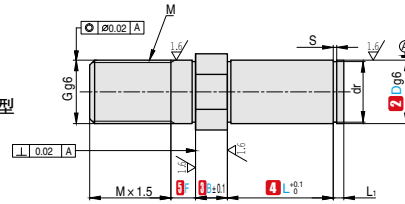

HCGSHD
螺纹长度选择型

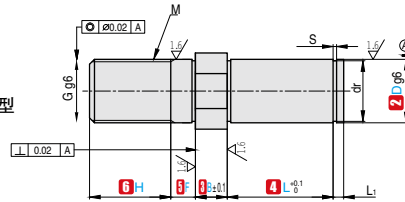

1 代号	轴径		3 B 指定单位 1mm	4 L 指定单位 1mm	5 F 指定单位 1mm	6 ▲ H 指定单位 1mm	dr		主要尺寸								
	2 D	公差 g6					基准尺寸	容差	G g6	L1	S	E (参考尺寸)	W	M (粗牙)			
HCGSHX HCGSHD	3	-0.002 -0.008	2~30	3~50	3~8	3~6	2	+0.060 0	3	2	0.5	6.9	6	M3			
	4	-0.004 -0.012				4~8	3	4	0.7						7	M4	
	5					5~10	4	5		8.1							8
	6	-0.005 -0.014	2~60	5~100	5~10	6~12	5	+0.075 0	6		3	0.9	11.5	10	M8		
	8					8~16	7	+0.090 0	8	1.15						13	M10
	10					-0.004 -0.012	10~20	9.6	0 -0.090		10						
	12					-0.006 -0.017	10~100	5~15	12~24	11.5	0 -0.110					12	4
15	14.3	17	19.6	17	M12												

▲ 仅螺纹长度选择型可指定 H

材料说明

1 材料代码	材质	表面处理
A	45#	四氧化三铁保护膜
B	45#	无电解镀镍
D	304	无

▲ 各型号产品均附带符合轴径的挡圈

悬臂销 销轴
支点螺钉