
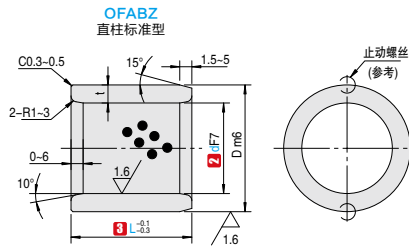


内径 F7 外径 m6

产品特点: 铜合金系列中最普通的规格, 薄壁型的厚度与干式衬套同级, 耐磨性比干式衬套优异, 可承受重载。

代号	类型	材质	内径公差	外径公差	硬度 HB	使用温度范围 (°C)
OFABZU	直柱薄壁型	高力黄铜 + 固体润滑剂 GR1	F7	m6	≥ 210	-50~+150
OFABZ	直柱标准型					

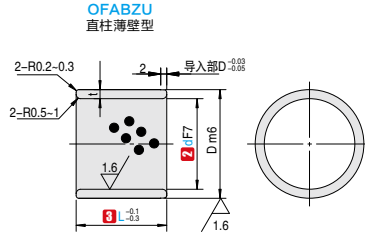

- ⚠ 配套轴公差推荐 (仅供参考):
d8: 一般用 (重载); e7: 一般用 (轻载);
f8: 高精度用; g6: 高精度用 (间隙负载)。
- ⚠ 基座孔推荐公差: H7

订购编号示例

1 代号 - **2** d - **3** L
OFABZ - 20 - 30

1 代号	2 dF7		Dm6		3 L	t	基座孔尺寸	推荐公差 H7
	5	+0.022 +0.010	7	+0.015 +0.006				
OFABZU	6		8		8 10 12	1	7	+0.015 0
	8	+0.028 +0.013	10		8 10 12 15 16 20		8	
	10		12		8 10 12 15 16 20 25		10	
	12		15	+0.018 +0.007	10 12 15 16 20 25		12	
	13	+0.034 +0.016	16		10 12 15 16 20 25	1.5	15	+0.018 0
	15		18		10 12 15 16 20 25 30		16	
	16		20		10 12 15 16 20 25 30		18	
	18		22	+0.021 +0.008	12 15 16 20 25 30	2	20	+0.021 0
	20	+0.041 +0.020	24		15 16 20 25 30 40		22	
	25		29		15 16 20 25 30 40		24	
	30		34		15 16 20 25 30 40		29	
	35	+0.050 +0.025	40	+0.025 +0.009	20 25 30 40	2.5	34	+0.025 0
	40		45		20 25 30 40 50		40	
	50		55	+0.030 +0.011			30 40 50	
							55	

内径 F7 外径 m6

1 代号	2 dF7		Dm6		3 L	t	基座孔尺寸	推荐公差 H7			
OFABZ	5	+0.022	9	+0.015	8 9 10 12 15	2	9	+0.015			
	6	+0.010	10	+0.006	8 9 10 12 15 16 19 20		10	0			
	8	+0.028	12	+0.018 +0.007	8 9 10 12 15 16 19 20 25		12	+0.018			
	10	+0.013	14		8 9 10 12 15 16 19 20 25 30		14		0		
	12	+0.034 +0.016	18	+0.021 +0.008	8 9 10 12 15 16 19 20 25 30 35	3	18	+0.021			
	13		19		10 12 15 16 20 25 30 35		19		0		
	14		20		10 12 15 20 25 30		20		+0.021		
	15		21		9 10 12 15 16 19 20 25 30 35 40		21			0	
	16	22	9 10 12 15 16 19 20 25 30 35 40	22	4	22	+0.021				
	18	24	9 10 12 15 16 20 25 30 35 40	24		0					
	20	+0.041 +0.020	28	+0.025 +0.009	9 10 12 15 16 19 20 25 30 35 40 50 60	4	28	+0.025			
	20A		30		10 12 15 16 20 25 30 35 40 50		30		0		
	22		32		10 15 20 25		32		5	32	+0.025
	25		33		12 15 16 19 20 25 30 35 40 50 60		33			0	
	25A	35	12 15 16 20 25 30 35 40 50 60	35	4	35	+0.025				
	28	38	20 25 30 40	38		0					
	30	38	12 15 16 20 25 30 35 40 50 60 70	38	4	38	+0.025				
	30A	40	12 15 16 20 25 30 35 40 50 60 70	40		0					
	32	+0.050 +0.025	42	+0.030 +0.011	20 30 40	5	42	+0.030			
	35		44		20 25 30 35 40 50 60 70		44		4.5	44	+0.030
	35A		45		20 25 30 35 40 50 60 70		45			0	
	40		50		15 20 25 30 35 40 50 60 70 80 90 100		50		5	50	7.5
	40A	55	15 20 25 30 35 40 50 60	55	7.5	55	5.5	55	+0.030		
	45	56	30 35 40 50 60	56	5.5	56		7.5		56	+0.030
	45A	60	12 30 35 40 50 60	60	5.5	60	7.5		60	+0.030	
	45B	60	30 35 40 50 60 70 80	60	7.5	60		5	60		+0.030
	50	62	20 30 35 40 50 60 70 80	62	5	60	6		62	+0.030	
	50A	65	30 35 40 50 60 70 80	65	7.5	65		7.5	65		+0.030
	50B	70	30 35 40 50 60 70 80 90 100	70	7.5	65	7.5		70	+0.030	
	55	74	30 35 40 50 60 70	74	7.5	70		7	74		+0.030
	60	75	30 35 40 50 60 70 80 100	75	7	74	7.5		75	+0.030	
	60A	75	30 35 40 50 60 70 80 90 100	75	7.5	75		6	75		+0.030
	63	75	50 60 70 80	75	6	75	7.5		75	+0.030	
	65	80	40 50 60 70 80	80	7.5	80		7.5	80		+0.030
	70	85	30 35 40 50 60 70 80 90 100	85	7.5	85	10		85	+0.030	
	70A	90	50 60 70 80 90 100	90	10	90		7.5	90		+0.030
	75	90	50 60 70 80 90 100	90	7.5	90	10		95	+0.030	
	75A	95	60 70 80 90 100	95	10	95		8	96		+0.030
	80	96	40 50 60 70 80 90 100 120	96	8	96	7.5		100	+0.030	
	80A	100	40 50 60 70 80 90 100 120 130 140	100	7.5	100		110	110		+0.030
85	100	60 70 80	100	7.5	100	120	120		+0.030		
90	110	30 40 50 60 70 80 90 100 120	110	110	110		130	130		+0.030	
100	120	50 60 70 80 90 100 120 130 140	120	120	120	140		140	+0.030		
110	130	50 60 70 80 100 120	130	130	130		145	145		+0.030	
120	140	60 70 80 90 100 120 130 140	140	140	140	150		150	+0.030		
125	145	80 100 120 140	145	145	145		160	160		+0.030	
130	150	80 100 120 130 140	150	150	150	170		170	+0.030		
140	160	100 120 130 140 150	160	160	160		180	180		+0.030	
150	170	80 100 120 140 150	170	170	170	190		190	+0.030		
160	180	80 100 120 140 150	180	180	180		200	200		+0.030	
170	190	80 100 120 140 150 160	190	190	190	210		210	+0.030		
180	200	100 120 140 150 160 180	200	200	200		230	230		+0.030	
190	210	100 120 140 150 160 180 200	210	210	210	15		230	+0.030		
200	230	100 120 140 150 160 180 200 220	230	230	230						