


## 小压缩量型

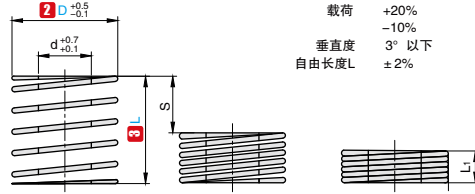

载荷 +20%  
-10%  
垂直度 3° 以下  
自由长度L ±2%

旋向: 右旋

**DSJPMC**  
小压缩量型

订购编号示例

**1** 代号 - **2**D - **3**L  
DSJPMC - 10.5 - 60

1 代号	2 D	3 L	d	刚度系数 N/mm (kgf/mm)	压紧长度 L <sub>1</sub> (mm)	S=L×40%	
						S (mm)	载荷 N (kgf)
DSJPMC	10.5	5.5	20	10.90(1.11)	10	8	87.2 (8.9)
			25	8.72(0.89)	12.5	10	
			30	7.26(0.74)	15	12	
			35	6.23(0.63)	17.5	14	
			40	5.45(0.56)	20	16	
			45	4.84(0.49)	22.5	18	
			50	4.36(0.44)	25	20	
			55	3.96(0.40)	27.5	22	
			60	3.63(0.37)	30	24	
			65	3.35(0.34)	32.5	26	
			70	3.11(0.32)	35	28	
			75	2.91(0.30)	37.5	30	
	80	2.72(0.28)	40	32			
	12.5	6.5	20	15.25(1.56)	10	8	122.0 (12.4)
			25	12.20(1.24)	12.5	10	
			30	10.17(1.04)	15	12	
			35	8.72(0.89)	17.5	14	
			40	7.63(0.78)	20	16	
			45	6.78(0.69)	22.5	18	
			50	6.10(0.62)	25	20	
			55	5.55(0.57)	27.5	22	
			60	5.08(0.52)	30	24	
			65	4.69(0.48)	32.5	26	
			70	4.36(0.44)	35	28	
			75	4.07(0.41)	37.5	30	
	80	3.81(0.39)	40	32			
	14.5	8.5	20	24.51(2.50)	10	8	196.0 (20.0)
			25	19.61(2.00)	12.5	10	
			30	16.37(1.67)	15	12	
			35	14.02(1.43)	17.5	14	
			40	12.25(1.25)	20	16	
			45	10.88(1.11)	22.5	18	
			50	9.80(1.00)	25	20	
			55	8.92(0.91)	27.5	22	
			60	8.13(0.83)	30	24	
			65	7.55(0.77)	32.5	26	
70			6.96(0.71)	35	28		
75			6.57(0.67)	37.5	30		
80			6.17(0.63)	40	32		
90			5.49(0.56)	45	36		
100			4.90(0.50)	50	40		
125			3.92(0.40)	62.5	50		
150			3.27(0.33)	75	60		

1 代号	2 D	3 L	d	刚度系数 N/mm (kgf/mm)	压紧长度 L <sub>1</sub> (mm)	S=L×40%	
						S (mm)	载荷 N (kgf)
DSJPMC	17	10.5	25	29.41(3.00)	12.5	10	294.2 (30.0)
			30	24.51(2.50)	15	12	
			35	20.98(2.14)	17.5	14	
			40	18.43(1.88)	20	16	
			45	16.37(1.67)	22.5	18	
			50	14.70(1.50)	25	20	
			55	13.33(1.36)	27.5	22	
			60	12.25(1.25)	30	24	
			65	11.27(1.15)	32.5	26	
			70	10.49(1.07)	35	28	
			75	9.80(1.00)	37.5	30	
			80	9.21(0.94)	40	32	
	21	13.5	30	35.10(3.58)	15	12	422.0 (43.0)
			35	30.10(3.07)	17.5	14	
			40	26.37(2.69)	20	16	
			45	23.43(2.39)	22.5	18	
			50	21.08(2.15)	25	20	
			55	19.12(1.95)	27.5	22	
			60	17.55(1.79)	30	24	
			65	16.18(1.65)	32.5	26	
			70	15.10(1.54)	35	28	
			75	14.02(1.43)	37.5	30	
			80	13.14(1.34)	40	32	
			90	11.66(1.19)	45	36	
100	10.59(1.08)	50	40				
110	9.61(0.98)	55	44				
120	8.82(0.90)	60	48				
125	8.43(0.86)	62.5	50				
130	8.13(0.83)	65	52				
140	7.55(0.77)	70	56				
150	7.06(0.72)	75	60				
175	6.02(0.61)	87.5	70				
200	5.27(0.54)	100	80				

## 小压缩量型

1 代号	2 D	3 L	d	刚度系数 N/mm (kgf/mm)	压紧长度 L <sub>1</sub> (mm)	S=L×40%		S (mm)	载荷 N (kgf)						
						S	载荷 N								
DSJPMC	26	16.5	26	30	47.36(4.83)	15	12	569.0 (58.0)	834.0 (85.0)						
				35	40.59(4.14)	17.5	14								
				40	35.59(3.63)	20	16								
				45	31.57(3.22)	22.5	18								
				50	28.43(2.90)	25	20								
				55	25.88(2.64)	27.5	22								
				60	23.63(2.41)	30	24								
				65	21.86(2.23)	32.5	26								
				70	20.29(2.07)	35	28								
				75	18.92(1.93)	37.5	30								
				80	17.75(1.81)	40	32								
				90	15.78(1.61)	45	36								
				100	14.21(1.45)	50	40								
				110	12.94(1.32)	55	44								
				120	11.86(1.21)	60	48								
				125	11.37(1.16)	62.5	50								
				130	10.98(1.12)	65	52								
				140	10.19(1.04)	70	56								
				150	9.51(0.97)	75	60								
				175	8.13(0.83)	87.5	70								
				200	7.15(0.73)	100	80								
				225	6.32(0.64)	112.5	90								
				250	5.69(0.58)	125	100								
				DSJPMC	31	21	31			40	49.03(5.00)	20	16	784.0 (79.9)	1003 (102)
										45	43.54(4.44)	22.5	18		
50	39.22(4.00)	25	20												
55	35.66(3.64)	27.5	22												
60	32.65(3.33)	30	24												
65	30.17(3.08)	32.5	26												
70	28.04(2.86)	35	28												
75	26.15(2.67)	37.5	30												
80	24.51(2.50)	40	32												
90	21.77(2.22)	45	36												
100	19.61(2.00)	50	40												
110	17.84(1.82)	55	44												
120	16.37(1.67)	60	48												
125	15.69(1.60)	62.5	50												
130	15.10(1.54)	65	52												
140	14.02(1.43)	70	56												
150	13.04(1.33)	75	60												
160	12.25(1.25)	80	64												
170	11.57(1.18)	85	68												
175	11.17(1.14)	87.5	70												
180	10.88(1.11)	90	72												
190	10.29(1.05)	95	76												
200	9.80(1.00)	100	80												
250	7.84(0.80)	125	100												
300	6.57(0.67)	150	120												
DSJPMC	46	33	46	50	63.74(6.50)	25	20	1275 (130)	1570 (160)						
				60	53.15(5.42)	30	24								
				70	45.50(4.64)	35	28								
				80	39.81(4.06)	40	32								
				90	35.40(3.61)	45	36								
				100	31.87(3.25)	50	40								
				110	28.92(2.95)	55	44								
				120	26.57(2.71)	60	48								
				125	25.49(2.60)	62.5	50								
				130	24.51(2.50)	65	52								
				140	22.75(2.32)	70	56								
				150	21.28(2.17)	75	60								
				175	18.24(1.86)	87.5	70								
				200	15.98(1.63)	100	80								
				225	14.12(1.44)	112.5	90								
				250	12.74(1.30)	125	100								
				275	11.57(1.18)	137.5	110								
				300	10.59(1.08)	150	120								
				DSJPMC	52	37	52			60	65.38(6.67)	30	24	1570 (160)	1570 (160)
										70	56.04(5.71)	35	28		
										80	49.03(5.00)	40	32		
										90	43.58(4.44)	45	36		
										100	39.23(4.00)	50	40		
										110	35.66(3.64)	55	44		
										120	32.69(3.33)	60	48		
130	30.17(3.08)	65	52												
140	28.02(2.86)	70	56												
150	26.15(2.67)	75	60												
175	22.42(2.29)	87.5	70												
200	19.61(2.00)	100	80												
225	17.43(1.78)	112.5	90												
250	15.69(1.60)	125	100												
275	14.26(1.45)	137.5	110												
300	13.08(1.33)	150	120												
DSJPMC	37	26	37					250	8.33(0.85)	125	100	834.0 (85.0)	834.0 (85.0)		
								300	6.96(0.71)	150	120				
								50	50.01(5.10)	25	20				
								60	41.68(4.25)	30	24				
								70	35.72(3.64)	35	28				
								80	31.26(3.19)	40	32				
								90	27.79(2.83)	45	36				
								100	25.01(2.55)	50	40				
								110	22.73(2.32)	55	44				
				120	20.84(2.13)	60	48								
				130	19.24(1.96)	65	52								
				140	17.86(1.82)	70	56								
				150	16.67(1.70)	75	60								
				160	15.63(1.59)	80	64								
				170	14.71(1.50)	85	68								
				180	13.89(1.42)	90	72								
				190	13.16(1.34)	95	76								
				200	12.50(1.28)	100	80								
				225	11.11(1.13)	112.5	90								
				250	10.00(1.02)	125	100								
				275	9.09(0.93)	137.5	110								
				300	8.34(0.85)	150	120								
				DSJPMC	46	33	46	50	63.74(6.50)	25	20			1275 (130)	1570 (160)
								60	53.15(5.42)	30	24				
								70	45.50(4.64)	35	28				
80	39.81(4.06)	40	32												
90	35.40(3.61)	45	36												
100	31.87(3.25)	50	40												
110	28.92(2.95)	55	44												
120	26.57(2.71)	60	48												
125	25.49(2.60)	62.5	50												
130	24.51(2.50)	65	52												
140	22.75(2.32)	70	56												
150	21.28(2.17)	75	60												
175	18.24(1.86)	87.5	70												
200	15.98(1.63)	100	80												
225	14.12(1.44)	112.5	90												
250	12.74(1.30)	125	100												
275	11.57(1.18)	137.5	110												
300	10.59(1.08)	150	120												
DSJPMC	52	37	52					60	65.38(6.67)	30	24	1570 (160)	1570 (160)		
								70	56.04(5.71)	35	28				
								80	49.03(5.00)	40	32				
								90	43.58(4.44)	45	36				
								100	39.23(4.00)	50	40				
								110	35.66(3.64)	55	44				
								120	32.69(3.33)	60	48				
				130	30.17(3.08)	65	52								
				140	28.02(2.86)	70	56								
				150	26.15(2.67)	75	60								
				175	22.42(2.29)	87.5	70								
				200	19.61(2.00)	100	80								
				225	17.43(1.78)	112.5	90								
				250	15.69(1.60)	125	100								
				275	14.26(1.45)	137.5	110								
				300	13.08(1.33)	150	120								

### ■ 载荷的计算方法

载荷 = 刚度系数 × 压缩量

(国际单位)  $N = N/mm \times Smm$   
 $kgf = kgf/mm \times Smm$   
 $(kgf = N \times 0.101972)$

▲ 压紧长度为参考值, 且因生产批次不同会稍有偏差。

▲ 使用次数: 100万次 (L×45% 为 30万次)

代号	类型	材质
DSJPMC	小压缩量型	SWOSC-V 相当